



Subminiature Low Leakage Radial – Type SMR/LL

ALUMINUM ELECTROLYTIC CAPACITORS

The radial type capacitors are available over a capacitance range of 0.1UF through 220UF, with a standard capacitance tolerance of $\pm 20\%$.

Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

Capacitance and tolerance: Capacitance measurements shall be made by referred to a frequency of $120\text{Hz}_{-5}^{+10}\text{Hz}$. The capacitance shall be within the specified tolerance of $\pm 20\%$. ($\pm 10\%$ units are available on request).

Leakage current: Measurement shall be made at rated DC voltage with an application of a steady source of power, such as a regulated power supply. A current-limiting resistor of 1,000 ohms shall be connected in series with each capacitor under test. Rated DC working voltage shall be applied to the capacitor for a minimum of 30 minutes, 24 to 48 hours prior to making leakage current measurements.

The maximum leakage current at 5 minutes shall not exceed the value determined from the following equation or $0.4\mu\text{A}$, whichever is greater:

$$I = 0.002CV$$

- where: I = Leakage Current (μA)
- C = Nominal Capacitance (μF)
- V = Rated DC Voltage (V. DC)

Dissipation factor: Capacitors shall be measured at a frequency of 120Hz at 20°C with a maximum of 1 volt RMS applied during measurement. The dissipation factor shall not exceed the values in Table 1.

Table 1.

Rated Voltage (V. DC)	Dissipation Factor (%)
6.3	20
10	17
16	13
25	10
35	10
50	8
63	8

Low-temperature characteristics: The ratio of the impedance of -25°C to that of $+20^{\circ}\text{C}$ shall be less than the values in Table 2.

Table 2.

Rated Voltage (V. DC)	Z @ -25°C	Z @ -40°C
	Z @ $+20^{\circ}\text{C}$	Z @ $+20^{\circ}\text{C}$
6.3	4	8
10	3	6
16	2	4
25	2	4
35	2	3
50	2	3
63	2	3

Life test: Rated voltage shall be applied to the capacitors in series with a one thousand ohm resistor. All tests shall be conducted in a dry oven with circulating air. Capacitors shall be separated by a distance not less than 2.5CM and air circulation shall be provided to prevent temperature within 15CM of any capacitors from departing more than $+0^{\circ}\text{C} - 5^{\circ}\text{C}$ from the nominal ambient temperature of the chamber. Capacitors shall not be exposed to direct radiation from heating elements.

Capacitors shall be subjected to for a period of 1000 hours at 85°C .

After the completion of the life test capacitors shall be returned to standard test conditions.

Table 3.

Capacitance	Within $\pm 20\%$ of initial measurements
Dissipation factor	200% less of value in Table 1.
Leakage current	Same as specified under Leakage Current
Appearance	Free from leakage of electrolyte and/or other noticeable deformation

Shelf life test: Capacitors shall be subjected to $+85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 1000 ± 12 hours during which time no voltage shall be applied.

Following this period the capacitors shall be cool to room temperature and then D.C. rated voltage shall be applied to the capacitors for 30 minutes after which the capacitors shall be discharged.


After completion of these procedures, the capacitors shall meet the requirements as listed in Table 3.



Subminiature Low Leakage Radial – Type SMR/LL

● CONFIGURATION

Dimensions: mm

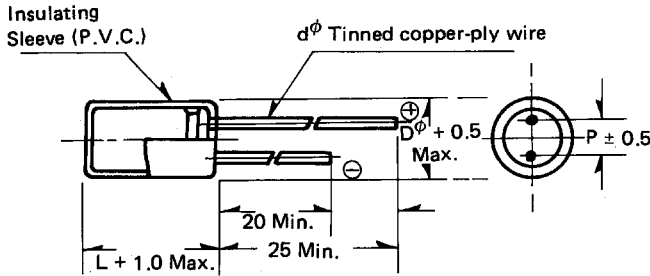

Outside Diameter	D ϕ	4	5	6.3
Lead Spacing	P	1.5	2.0	2.5
Lead Wire	d ϕ	0.45	0.5	0.5

RIPPLE CURRENT IN mA-RMS (at 120Hz, +85°C)—peak voltage not to exceed rated DC voltage—

Rated Voltage (V)	6.3	10	16	25	35	50	63
Surge Voltage (V)	8	13	20	32	44	63	79
CAP. (μ F)							
0.1	1.0	1.0	1.0	1.0	1.0	1.0	1.3
0.22	2.3	2.3	2.3	2.3	2.3	2.3	2.9
0.33	3.5	3.5	3.5	3.5	3.5	3.5	4.4
0.47	5.0	5.0	5.0	5.0	5.0	5.0	6.3
1.0	10	10	10	10	10	10	13
2.2	19	19	19	19	19	19	21
3.3	24	24	24	24	24	24	26
4.7	24	24	24	24	24	29	33
10	29	29	29	33	36	44	
22	34	38	44	51	57	70	
33	42	47	57	63			
47	50	59	68				
100	77	105	120				
220	140						

DIMENSIONS: Diameter (D ϕ) x Length (L): mm

Rated Voltage (V)	6.3	10	16	25	35	50	63
Surge Voltage (V)	8	13	20	32	44	63	79
CAP. (μ F)							
0.1	4x7	4x7	4x7	4x7	4x7	4x7	4x7
0.22	4x7	4x7	4x7	4x7	4x7	4x7	4x7
0.33	4x7	4x7	4x7	4x7	4x7	4x7	4x7
0.47	4x7	4x7	4x7	4x7	4x7	4x7	4x7
1.0	4x7	4x7	4x7	4x7	4x7	4x7	4x7
2.2	4x7	4x7	4x7	4x7	4x7	4x7	4x7
3.3	4x7	4x7	4x7	4x7	4x7	4x7	5x7
4.7	4x7	4x7	4x7	4x7	4x7	4x7	5x7
10	4x7	4x7	4x7	5x7	6.3x7	6.3x7	
22	4x7	4x7	5x7	6.3x7	6.3x7		
33	5x7	5x7	6.3x7	6.3x7			
47	5x7	5x7	6.3x7				
100	5x7	6.3x7	6.3x7				
220	6.3x7						

TAPING FOR AUTOMATIC INSERTION AND LEAD FORMING ARE AVAILABLE ON REQUEST