
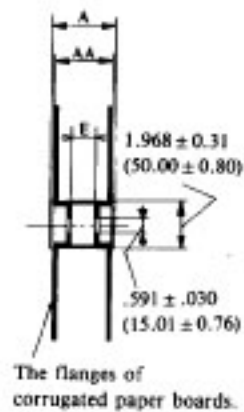



**AXIAL LEAD CAPACITORS — PACKING INFORMATION**


**Taped & Reel Type Dimensions inch (mm)**

Across Hubs	Across Flanges	Across Points	Across Flats	Capacitor Spacing		Tape Spacing	Between Hub Holes	Tape Width
				1 Space	50 Spaces			
A Max.	AA Approx.	B Max.	BB Max.	C $\pm 0.12$ ( $\pm 0.30$ )	REF 50SC $\pm 0.079$ ( $\pm 2.00$ )	D $\pm 0.39$ ( $\pm 1.00$ )	E Approx.	F $\pm 0.039$ ( $\pm 1.00$ )
3.209 (81.50)	3.150 (80.00)	13.500 (342.90)	12.402 (315.00)	.197 (5.00)	9.842 (250.00)	2.047 (52.00)	2.165 (55.00)	.236 (6.00)



**Ammo Taped Type Dimensions**

Box for Taped Version

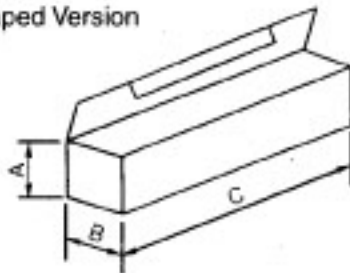

Dimensions

Symbol	Tapping Width in (mm)	
	1.02(26)	2.05(52)
A	2.16(55 $\pm 3$ )	2.16(55 $\pm 3$ )
B	2.00(50 $\pm 3$ )	2.76(70 $\pm 3$ )
C	10.0(255 $\pm 3$ )	10.0(255 $\pm 3$ )

**Standard Packing Quantity**

Type	Packing Style	Taped on Reel	Taped in Box	Bulk
1510 Type		5,000 pcs	4,000 pcs	1,000 pcs
2211 Type		5,000 pcs	2,000 pcs	500 pcs
2811 Type		5,000 pcs	2,000 pcs	500 pcs