


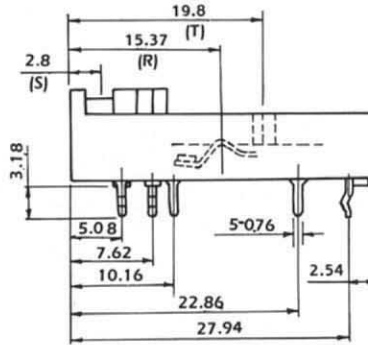


4.5φ TELEPHONE JACK

LJA0451 W/COVER
LJA0451N W/O COVER






**P.C.B. LAYOUT
(BOTTOM VIEW)**

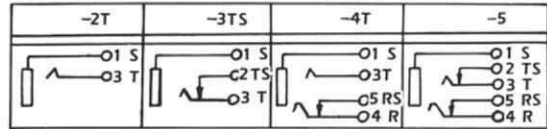


RU
 E 161805

LJA0452 W/COVER
LJA0452N W/O COVER

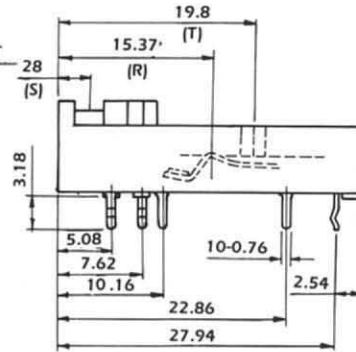


**P.C.B. LAYOUT
(BOTTOM VIEW)**



RU
 E 161805

MATING PLUG

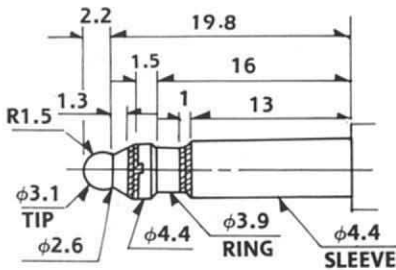

REQUIREMENTS

- CONTACT RESISTANCE: 30mΩ max. (INITIAL)
- INSULATION RESISTANCE: 100MΩ min. AT 500V DC.
- WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
- SOLDERING HEAT TEST: 260±5°C FOR 5±1 SECONDS.
- INSERTION FORCE: 0.68-3.18 KG.
- EXTRACTION FORCE: 0.68-3.18 KG.
- LIFE TIME: 5,000 CYCLES min.