


XLR JACK

XLR JACK MATING PLUG

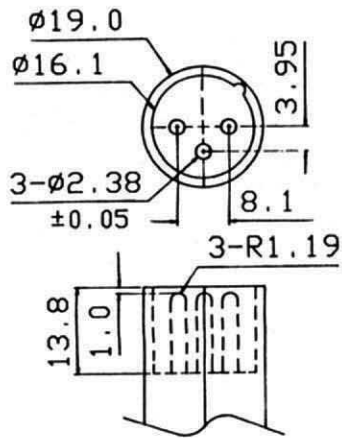

REQUIREMENTS

CONTACT RESISTANCE: $30\text{m}\Omega$ max. (INITIAL)

INSULATION RESISTANCE: $100\text{M}\Omega$ min. AT 500V DC.

WITHSTANDING VOLTAGE: 1500V AC FOR ONE MINUTE.

SOLDERING HEAT TEST: $260 \pm 5^\circ\text{C}$ FOR 5 ± 1 SECONDS.

INSERTION FORCE: 0.4 - 2.0 KG.

EXTRACTION FORCE: 0.4 - 3.0 KG.

LIFE TIME: 5,000 CYCLES min.