


TYPE
EOK

POLYESTER FILM CAPACITOR

NON-INDUCTIVE, EXTENDED FOIL,
FLAME RETARDANT ENCASED

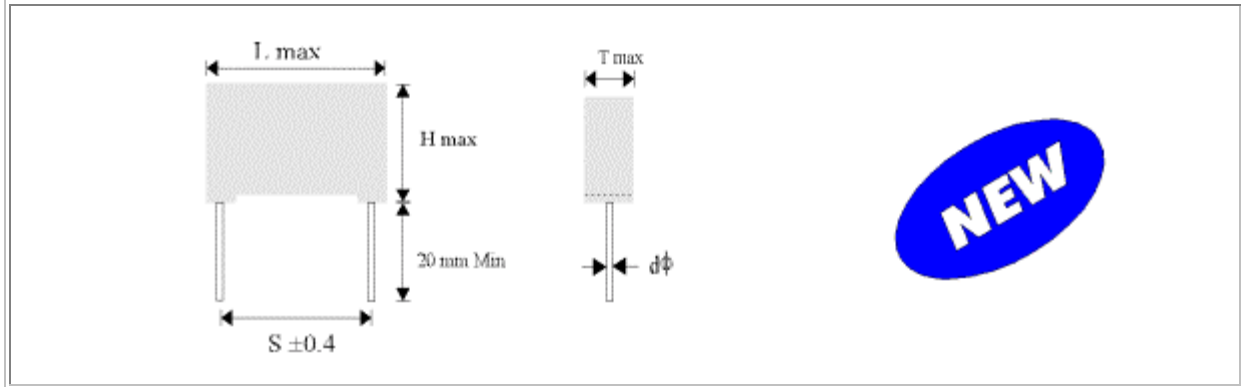

CASE CODE	L	T	H	S	d
C1	13.0	4.0	9.0	10.0	0.6
C2	13.0	5.0	11.0	10.0	0.6
C3	13.0	6.0	12.0	10.0	0.8
D1	18.0	5.0	11.0	15.0	0.8
D2	18.0	6.0	12.0	15.0	0.8
D3	18.0	7.5	13.5	15.0	0.8
D4	18.0	8.5	14.5	15.0	0.8
E1	26.5	6.0	15.0	22.5	0.8
E2	26.5	7.0	16.5	22.5	0.8
E3	26.5	8.5	17.0	22.5	0.8
E4	26.5	10.0	19.0	22.5	0.8
F1	32.0	11.0	20.0	27.5	0.8
F2	32.0	13.0	22.0	27.5	0.8
G1	32.0	15.0	30.0	27.5	0.8

APPLICATION

General purpose and pulse application.

FEATURES

- *Low self inductance and good attenuation.
- *Low dissipation factor.

GENERAL SPECIFICATION

1. OPERATING TEMPERATURE:

-40°CJ to 85°CJ

2. VOLTAGE RANGE:

100, 200, 400 and 600 VDC.

3. CAPACITANCE RANGE:

VDC Mfd	100V CASE CODE	200V CASE CODE	400V CASE CODE	600V CASE CODE
0.001				C1
0.0015				C1
0.0022				C1
0.0033			C1	C2
0.0047			C1	C2
0.0068		C1	C2	C3
0.01	C1	C1	C3	D1
0.015	C1	C2	D1	D3
0.022	C2	C3	D2	D4
0.033	C2	D1	D3	E2
0.047	C2	D1	D4	E3
0.068	D1	D3	E2	E4
0.1	D2	D3	E3	F1
0.15	D2	E2	F1	G1
0.22	E1	E2	F2	
0.33	E2	F1	G1	
0.47	E3	F2		
0.68	F1	G1		
1.0	F2			

0.001 to 1.0 Mfd.

4.DIELECTRIC STRENGTH:

250% of rated voltage for 5 sec. 25¢J.

5.CAPACITANCE TOLERANCE:

±5%, ±10% and ±20%.

6.INSULATION RESISTANCE:

50,000 Meg. Ohm at 25¢J.

7.DISSIPATION FACTOR:

.75 max. at 1KHz 25¢J.