



# RMB16A Update

Released April-2012



## RMB16A – Resistor, Micro-miniature, Leaded, Axial

- Micro-miniature size with plastic case
- Improved using the latest technology.
- Marking of resistor value on body.
- Robust leadwire of Nickel with tin plating. Suitable for soldering or welding.
- Resistance range: 1R0Ω to 10MΩ (5%) and 1R00Ω to 9M76Ω (1%).
- Zero Ohm Jumper available.
- Standard tolerance=±5% and 1%
- Power Rating=0.063W (1/16W)
- **Fully RoHS Compliant, REACH Compliant, and Lead Free construction.**

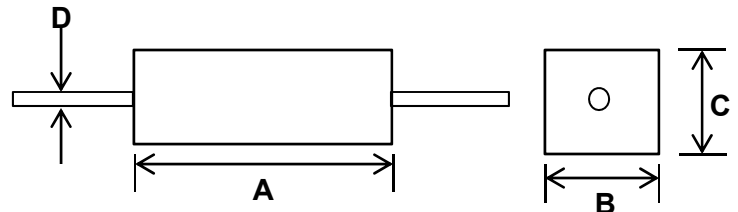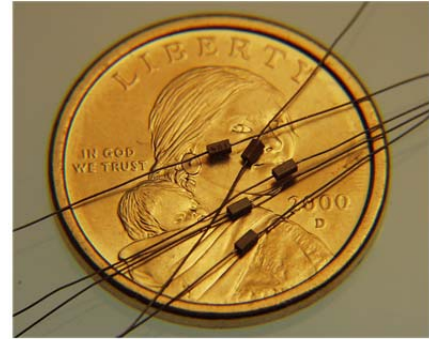

Lead Length=1.46 inches MINIMUM  
Epoxy Rundown=0.005 inches MAXIMUM per side

### Resistance Range:

	RMB16A	
<b>Tolerance</b>	J ±5%	F ±1%
<b>Resistance Range</b>	1R0Ω to 10MΩ	1R00Ω to 9M76Ω

### Marking:

Four Digit Identification Code-3 numerical and J for 5% tolerance  
Four Digit Identification Code- 4 numerical for 1% tolerance (F for 1% tolerance is assumed)

### Example:

47KΩ ±5%=473J     1K0Ω ±5%=102J  
000J=Zero Ω Jumper  
10R0Ω ±1%=10R0     1M00Ω ±1%=1004

### Ordering Information:

RMB16A-Value-Tolerance/Pack

### Example:

RMB16A-104-JB  
100KΩ/±5%/Bulk Pack  
RMB16A-1003-FB  
100KΩ/±1%/Bulk Pack

Dimension	Inches (mm)	Tolerance
A	0.075 (1.91mm)	+/-0.005 (0.13mm)
B	0.036 (0.91mm)	+/-0.005 (0.13mm)
C	0.036 (0.91mm)	+/-0.005 (0.13mm)
D	0.0074 (0.19mm)	+/-0.0001 (0.0025mm)

### Resistor Ratings for RMB16A:

<b>Power</b>	0.063 Watt (1/16W)
<b>Voltage</b>	50VDC MAXIMUM
<b>Working</b>	-55C to +70C No Derating +70C to +125C With Derating

### Temperature Coefficient of Resistance:

	RMB16A			
<b>Tolerance</b>	J ±5%	F ±1%		
<b>Resistance Range</b>	1R0Ω ~ 10MΩ	1R00Ω ~ 9R76Ω	10R0Ω ~ 1M00Ω	1M02Ω ~ 9M76Ω
<b>TCR (ppm/C)</b>	±200	±200	±100	±200



BRELE International  
2001 Whitfield Park Ave.  
Sarasota, FL 34243



Phone: 941-758-7500  
Sales: 800-237-4564  
Fax: 941-758-7556  
E-Mail: [sales@breintl.com](mailto:sales@breintl.com)  
Website: [www.breintl.com](http://www.breintl.com)  
Issue: May-2012 (Issue 3)